




Serie **EXPO-SFER**

Articolo **4604**

Full bore ball valve, female threaded and male union tail for manifold, with aluminium T-handle.

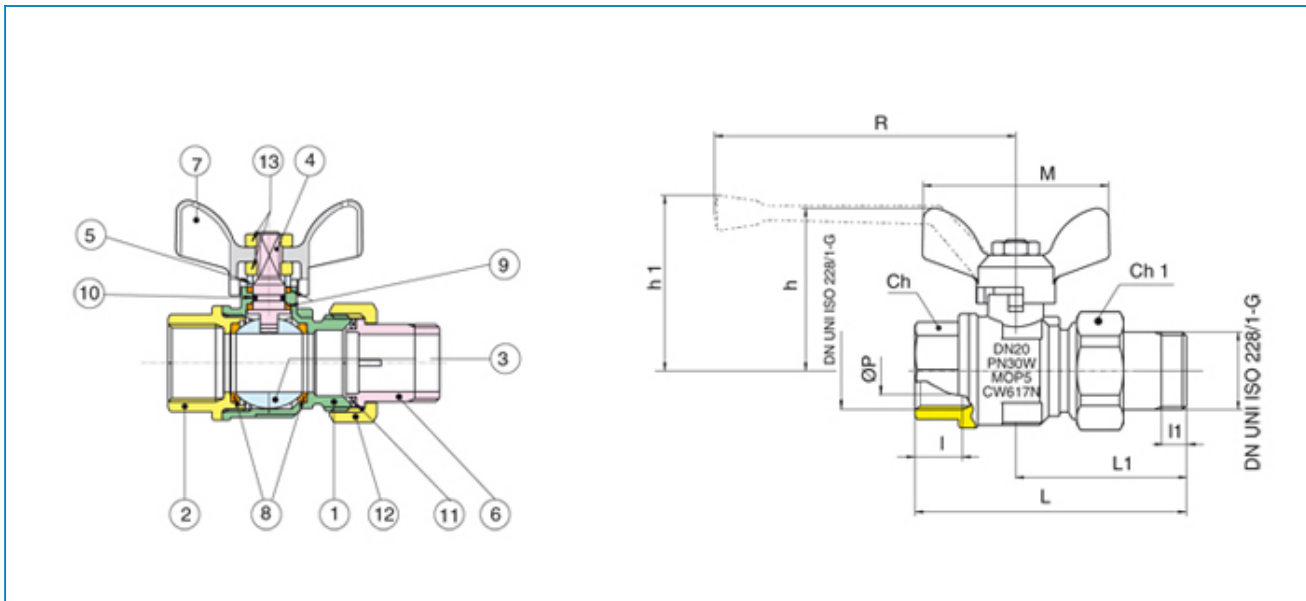

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN12165	1
2	END CONNECTION	OTTONE CW617N UNI EN12165	1
3	BALL	OTTONE CW617N UNI EN12165	1
4	STEM	OTTONE CW614N UNI EN12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN12164	1
6	UNION TAIL	OTTONE CW617N UNI EN12165	1
7	T-HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
8	BALL SEAT	P.T.F.E	2
9	THRUST WASHER	P.T.F.E	2
10	O-RING	NBR	1
11	O-RING	NBR	1
12	NUT	OTTONE CW 617N UNI EN12165	1
13	NUT	ACCIAIO CL.04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	I1	Ch	Ch1	L	L1	h	h1	M	R	Kv	PN	Kg
1/2"	15	40	80	4604250000	15	17,7	10	25	30	80,5	53	45,5	-	50	-	16,3	30	0,25
3/4"	20	20	40	4604270000	20	16,3	12	31	37	87	57	56	-	64	-	29,5	30	0,40
1"	25	15	30	4604300000	25	19,1	14	38	47	103	67	60	-	64	-	43	30	0,68
* 1 1/4"	32	8	16	4604350000	32	21,4	16	48	52	127,5	87	-	80	-	160	89	25	1,05

Limiti di temperatura: -20°C +160°C - Temperature range: -20°C +160°C.

* Versione con leva in alluminio - Version with aluminium handle.